

HERMES

The Hermes range offers two different sizes in two versions: symmetrical or asymmetrical lighting. Various types of columns (3 or 4 m) are available: cast iron, steel or wood. The luminaires can be equipped with metal halide lamps with ceramic arc tube, up to 150 W.





Design: P. Lallemand
Creation: Moonlight Design

Materials

Body: cast aluminium
Reflector wings: aluminium
Bracket: stainless steel
Optical assembly: spun aluminium closed by a thermally hardened curved glass
Reflector: deep drawn, chemically polished aluminium
Column: galvanised steel

Mechanical properties

Optical assembly tightness: IP66 (Sealsafe®) (*)
Control gear compartment tightness: IP43 (*)
Control gear incorporated under the optical assembly.

(*) According to EN 60598

Maintenance

The optical assembly and the control gear plate can be easily removed from the base of the luminaire.

Finishes

- Cast iron cylinders: metallised and lacquered (Ø 300 mm, height: 300 mm)
- Steel cylinders: stainless steel AISI 316, brushed or satiny (Ø 300 mm, height: 300 mm)
- Treated wood


Electrical specifications

Nominal voltage: 230 V – 50 Hz
Class I


Options

Loudspeakers incorporated in the column
Power points

Dimensions

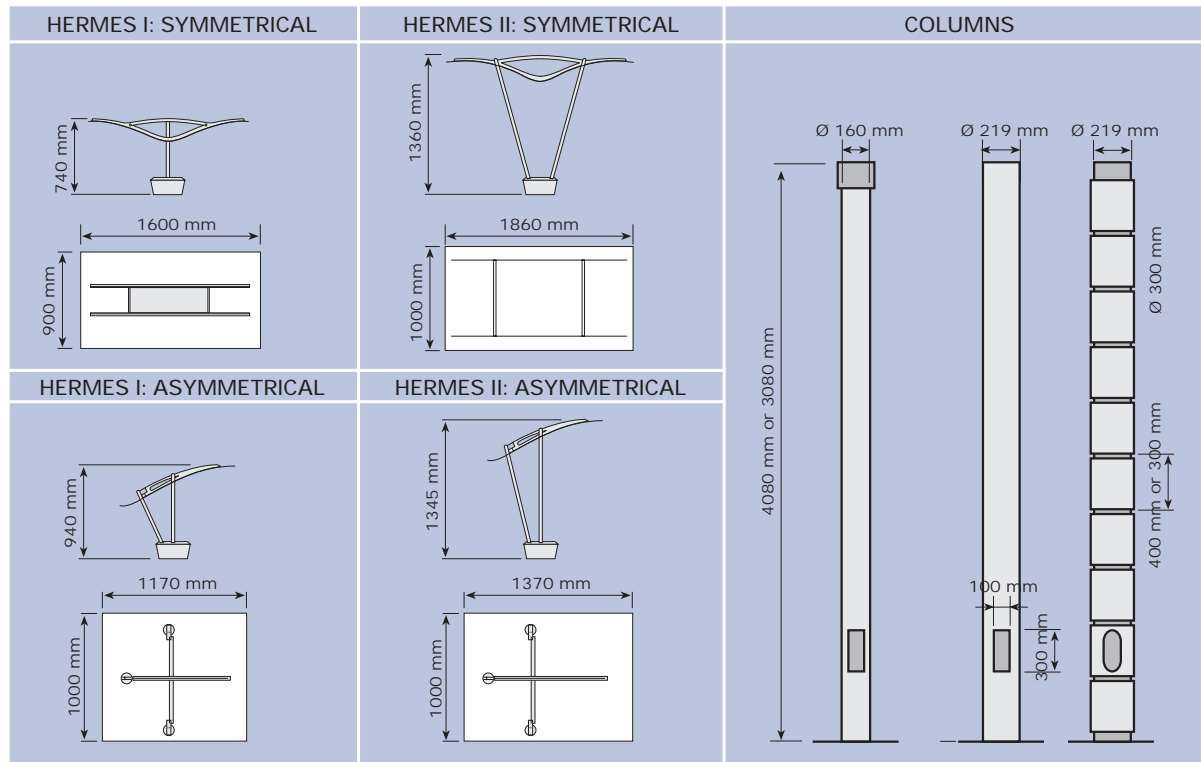

1. Base in white-painted cast aluminium
2. Sealsafe® optical assembly closed by a thermally hardened curved glass (IP66). The control gear plate is incorporated under the optical assembly.
3. Galvanised steel column. Various options can be incorporated (loudspeakers, power points,...)
4. Reflector wing in white-painted aluminium (thickness: 3.5 mm). The wing can be symmetrical or asymmetrical.
5. Stainless steel brackets

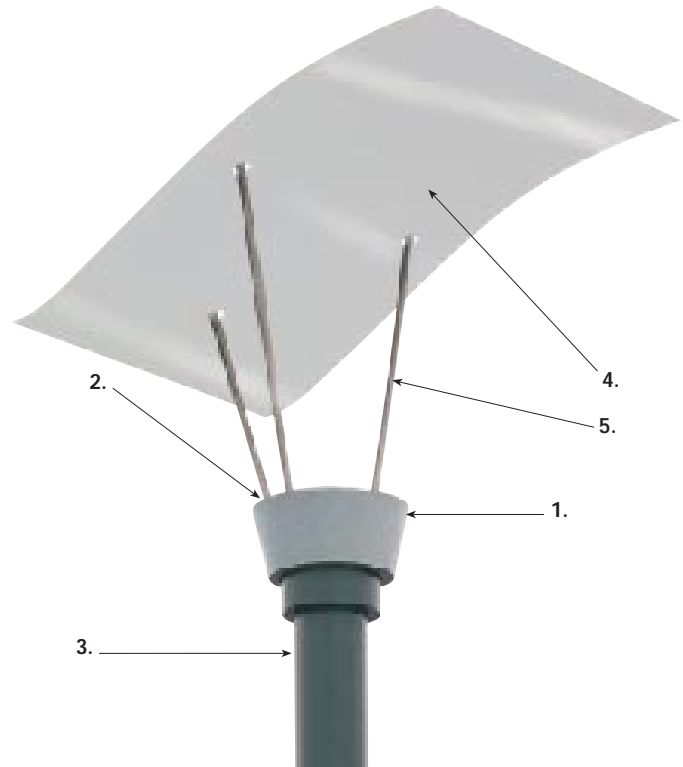


Lamp table

Indirect light distribution		
Lamp type	Reflector type	
	Hermes I	Hermes II
	1553 Symmetrical	1597 Asymmetrical
Metal halide with ceramic arc tube	70 W	70 W
	150 W	150 W
	1562 Symmetrical	1679 Asymmetrical
Metal halide with ceramic arc tube	70 W	70 W
	150 W	150 W

Mounting

- Luminaire: mounting on the column with 4 M8 press-screws
- Column: mounting on a plate (4xM24)

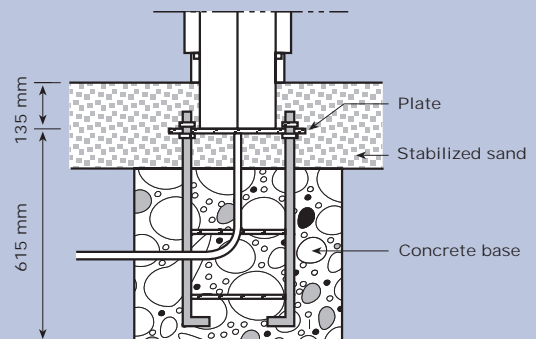

HERMES



HER-LOO-0001-AN-04